


REV	MODIFICATION	DATE	DRAW	APPROVE
R1				

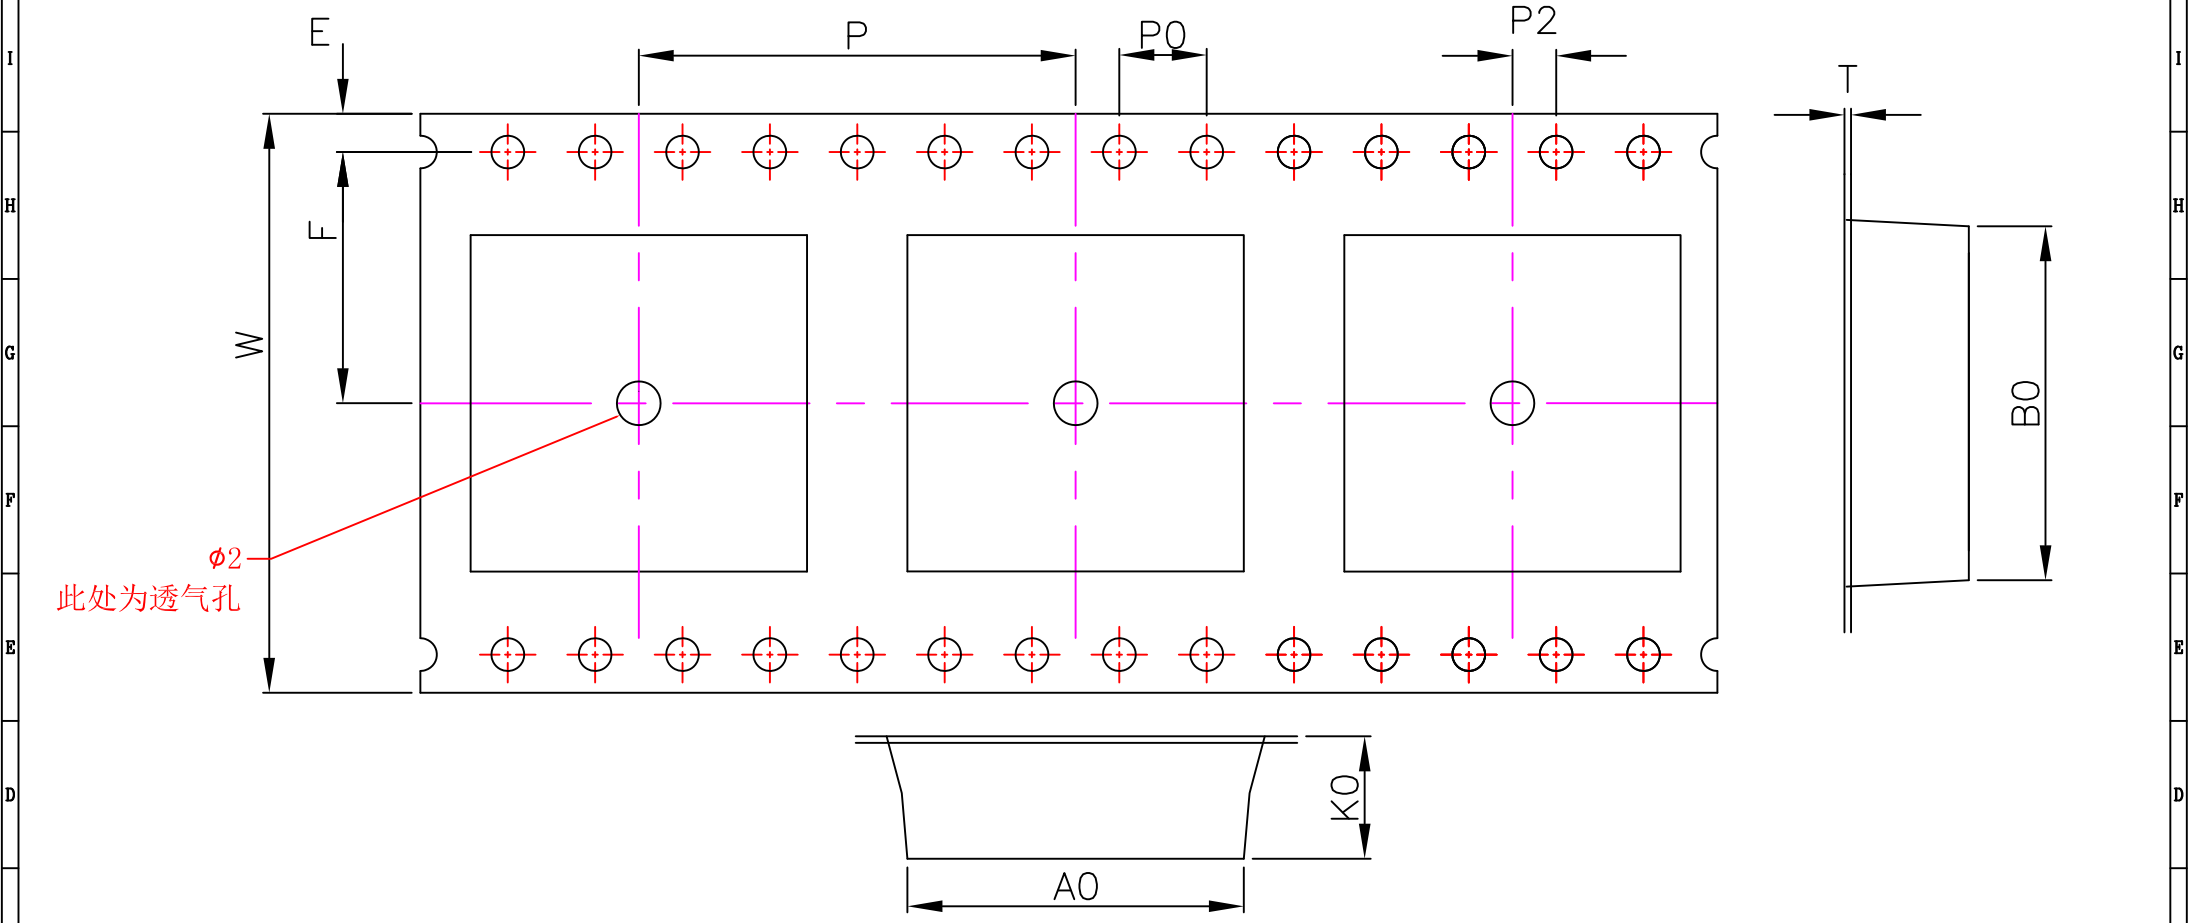

$\phi 2$
此处为透气孔

备注：此载带是在1.16.20.0113载带中间增加了透气孔

- 1.10 sprocket hole pitch cumulative tolerance $\pm 0.2\text{mm}$.
2. Carrier camber not to exceed 1mm in 250mm.
3. A0 and B0 measured on a plane 0.3mm above the bottom of the pocket.
4. K0 measured from a plane on the inside bottom of the nocket to the top surface of the carrier.
5. All dimension meet EIA-481-D requirements.
6. Material: Black Conductive Polystyrene Alloy.
7. Packing length per 56" reel: 21 Meters.
8. Component load per 13" reel: 900 pcs.

深圳市聚兴诚科技有限公司			
材质:	PS防静电黑色	日期:	2016.08.12
制图:		核准:	
比例:	1:1	单位:	mm
		版本:	V1.00

W	32.00 \pm 0.30	P	20.00 \pm 0.10	A0	15.4 \pm 0.10	B0	15.4 \pm 0.10
S0	——	P0	4.00 \pm 0.10	A1		B1	
E	1.75 \pm 0.10	P2	2.00 \pm 0.10	A2		B2	
F	14.25 \pm 0.10	D0	$\phi 1.50 \pm 0.10$	K0	2.4 \pm 0.10		
T	0.4 \pm 0.05	D1		K1			